


# JT8020 MACH 1

NOTES:  
 JT8020 PIN CAP THD PROTECTOR = 368-163  
 EZ-CONNECT BOX PLUG THD PROTECTOR = 368-164  
 HIGH FLOW BEACON HOUSING  
 BOX PLUG THD PROTECTOR = 110-934  
 EZ-CONNECT PIN CAP THD PROTECTOR = 369-334  
 EZ-CONNECT BOX PLUG THD PROTECTOR = 369-335  
**ALL HOUSINGS LISTED ON THIS MAP USE 868HL SIDELOAD BEACONS:**  
 102-154 OR 102-199 (CLOCKABLE)  
 CONNECTOR 220-061 ALLOWS THE USE OF 86B, 86BH, AND 86BG IN AN 868HL HOUSING.  
 041008

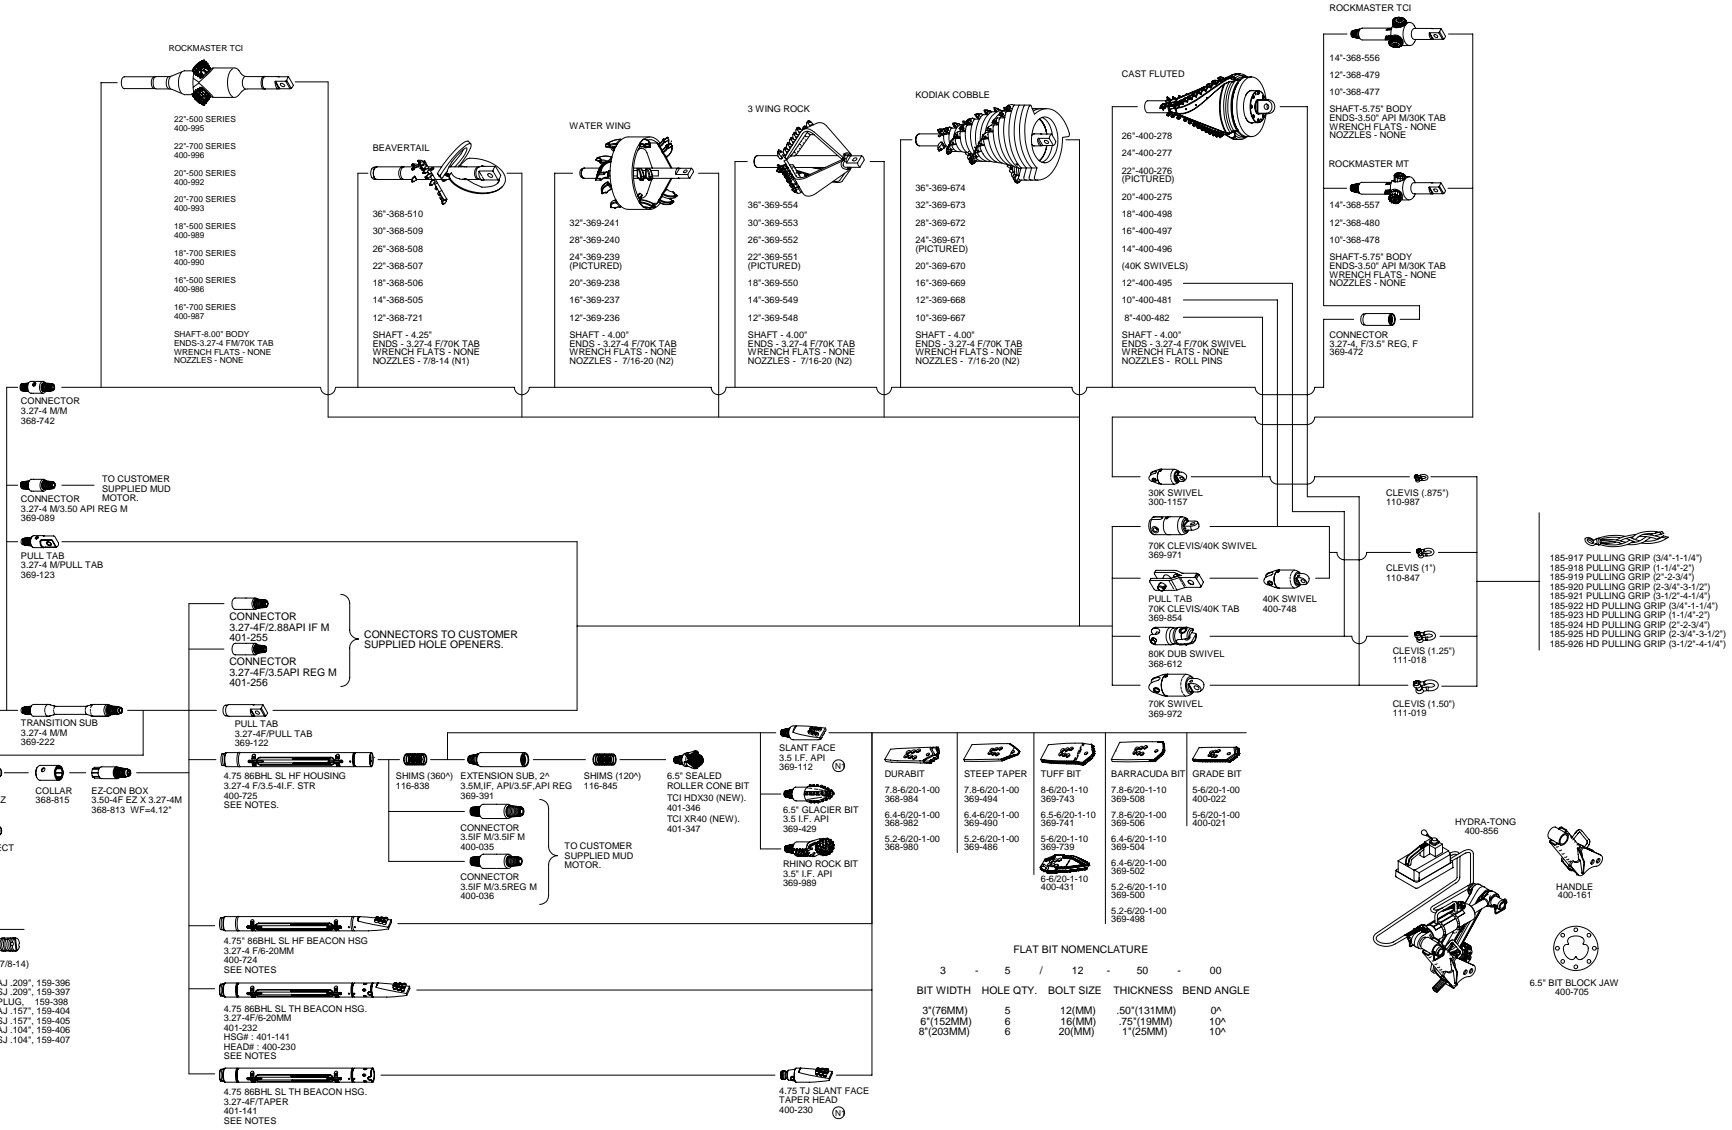

### NOZZLE CHART

(N1)	(N2)	(N3)
(1/4 NPT)	(7/16-20)	(7/8-14)
SJ .070, 149-200	AJ .104, 159-291	AJ .209", 159-396
SJ .100, 149-201	DJ .104, 159-292	SJ .209", 159-397
SJ .150, 149-202	SJ .104, 159-293	PLUG, 159-398
SJ .200, 149-203	PLUG, 159-294	AJ .157", 159-404
SJ .250, 149-204	AJ .074, 159-295	SJ .157", 159-405
	DJ .074, 159-296	AJ .104", 159-406
	SJ .074, 159-297	SJ .104", 159-407
	AJ .158, 159-422	
	SJ .188, 159-423	